


OS2 40

The maximum quality in a system reduced to the essentials: OS2 40. Designed for interior design projects, the agile and lightweight tubular profiles reproduce the same image of the OS2 windows and doors in the glass partitions, creating an effect of continuity between interiors and the building envelope.



OS2 40

the visible sections range from 12 to 47 mm while the depth is reduced to 42 mm, for glazing up to 15 mm. OS2 40 is the ideal system for lightweight doors and window or internal partitions.

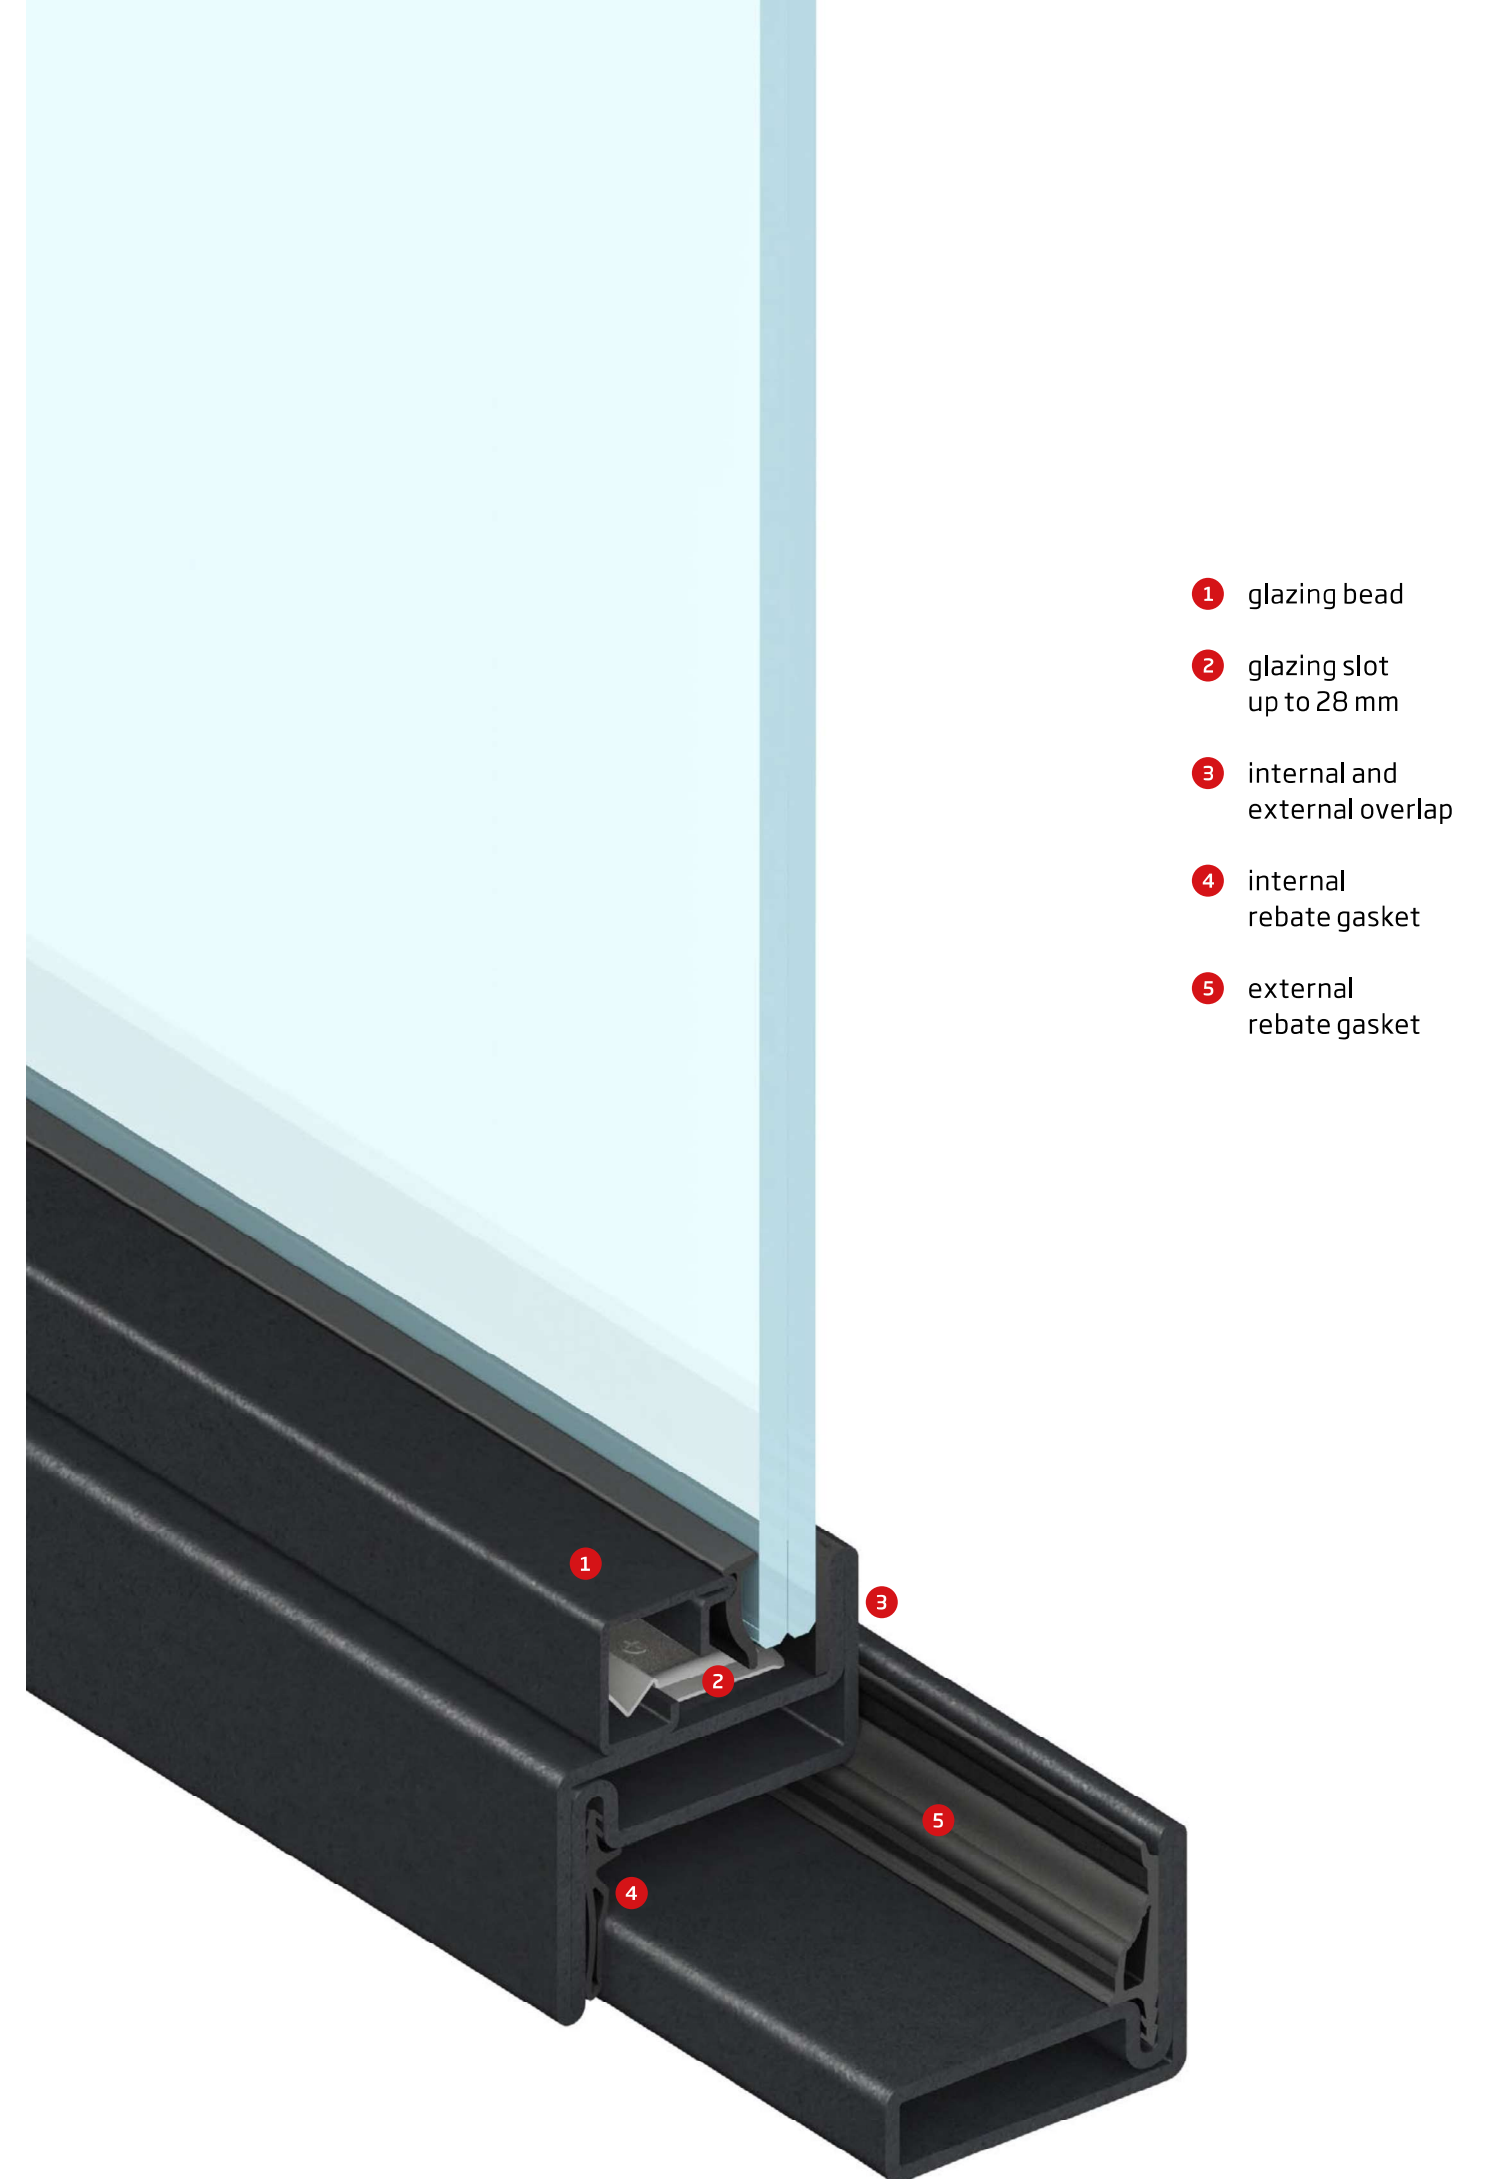



OS2 40 external view painted pickled steel




0 10 20 30 40 50


OS2 40 internal view painted pickled steel

OS2 40 type of opening

door
inward
opening

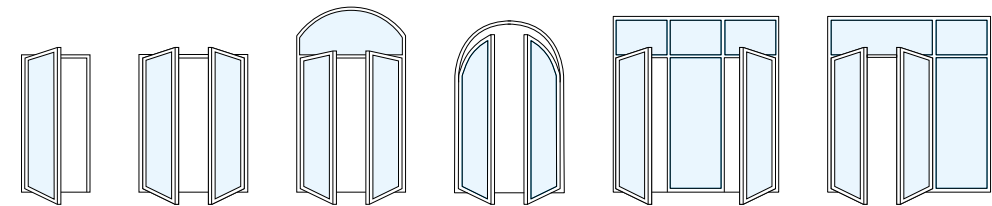

door
outward
opening

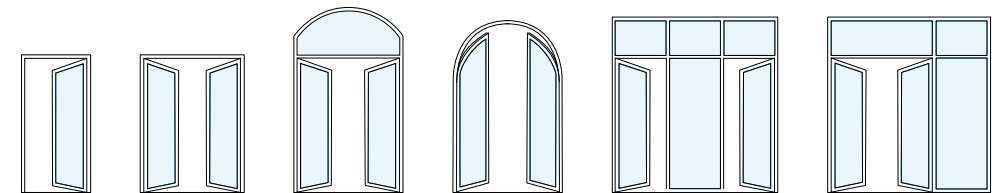

OS2 40 materials

pickled steel



paint
pickled steel

OS2 40 Guest Pavilion, Sa Tuna



systems EBE 65, OS2 40


materials corten steel and painted pickled steel

design This is Arquitectura

officina Alumilux & Metall-lux

location Sa Tuna, Costa Brava - Spain



profiles

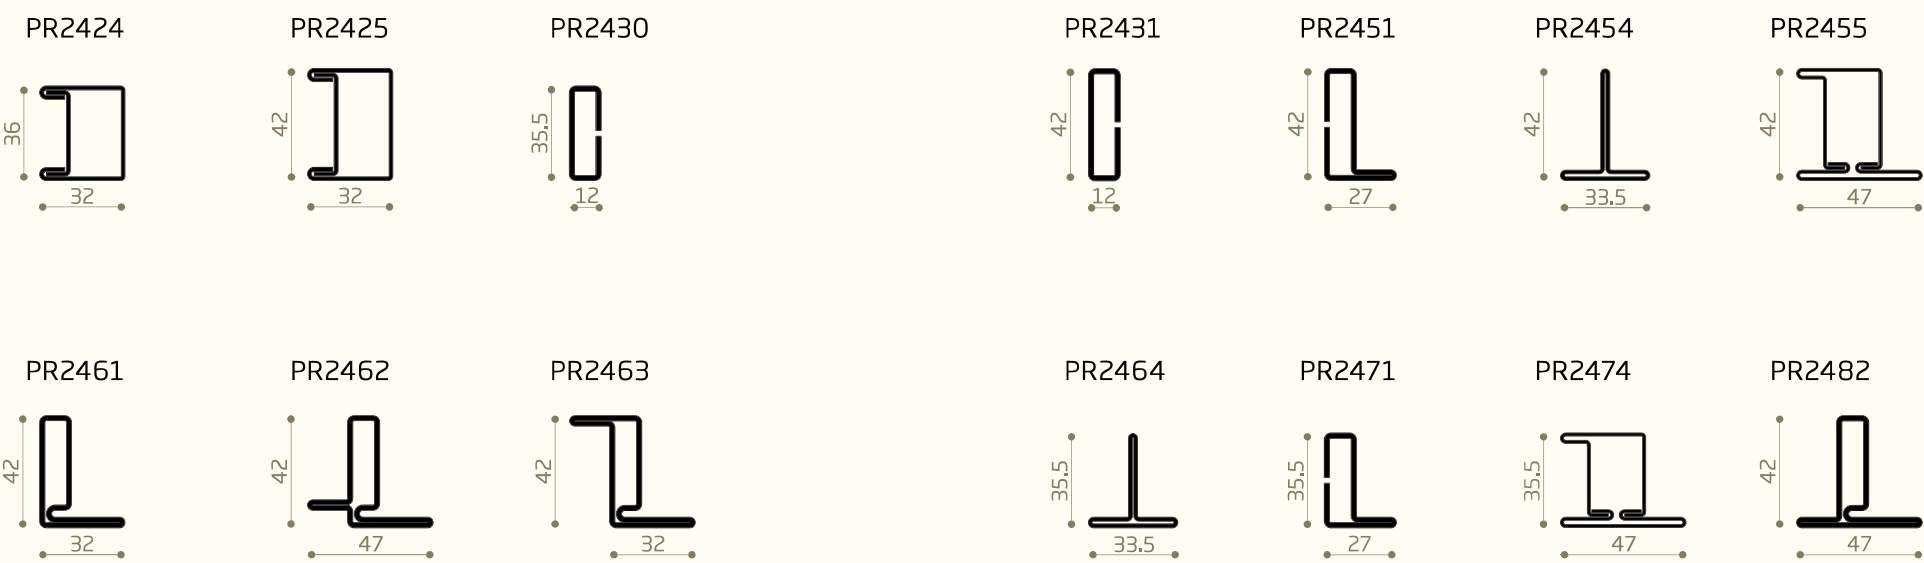

glazing beads



inward
opening
sections

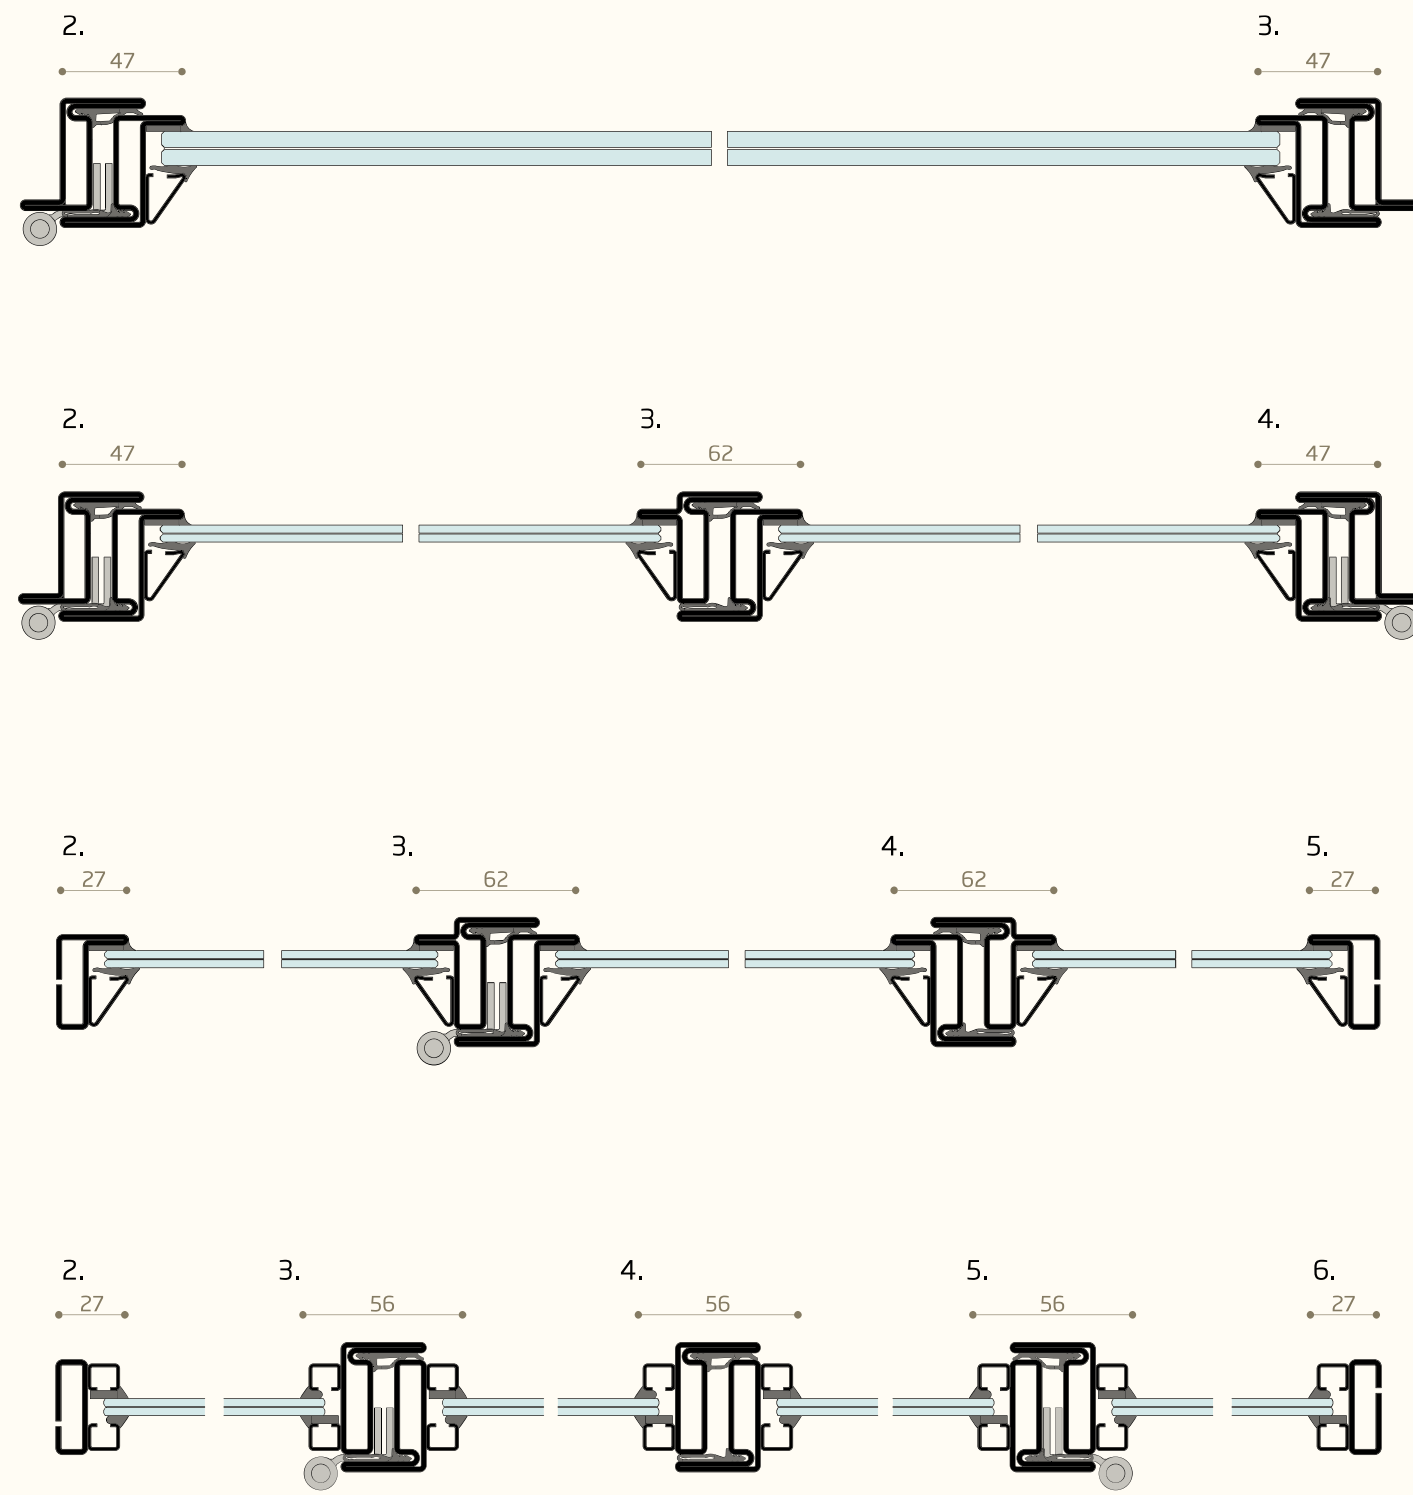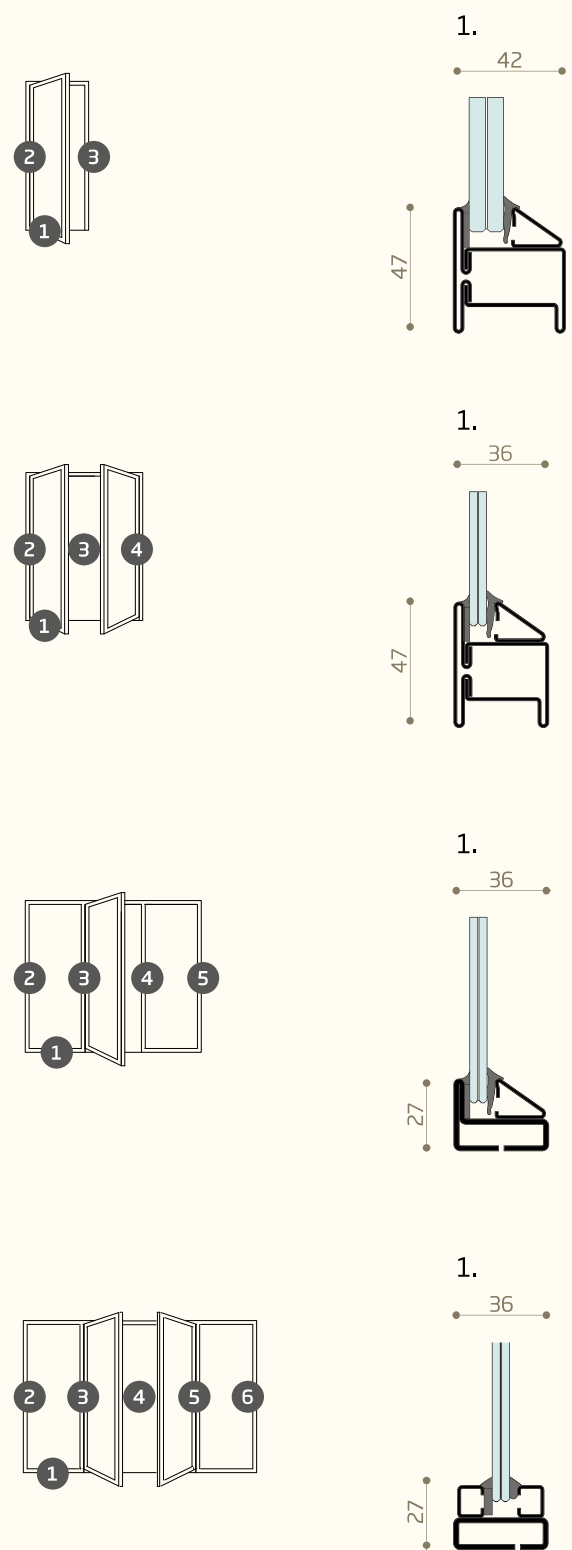

OS2 40

outward
opening
sections

